

# Cell Specification

INR 18650 32P

**Powerful for you.**  
**Fast for everyone.**



E-Mobility



Industrial



Medical



Power- and  
Gardentools



Drive  
System



Energy Storage  
Systems

# INR 18650 32P

## Cylindrical Lithium Ion Cell

### 1. Scope

This product specification has been prepared to specify the rechargeable lithium-ion cell to be supplied to the Customer by TerraE.

### 2. Description and Model

<b>2.1 Description</b>	Cell (lithium-ion rechargeable cell)
<b>2.2 Model Name</b>	INR 18650 32P

### 3. General Specifications


<b>3.1 Nominal Capacity</b>	3000mAh (at 0.2C Discharge)
<b>3.2 Minimum Capacity</b>	3000mAh (at 0.2C Discharge)
<b>3.3 Internal Impedance AT 1000 HZ</b>	≤20 mΩ (ACIR)
<b>3.4 Rating Charging Voltage</b>	4.25V
<b>3.5 Upper Limit Charging Voltage</b>	4.25V
<b>3.6 Nominal Voltage</b>	3.7V
<b>3.7 Charging Method</b>	CC-CV (100mA cut-off)
<b>3.8 Charging Current</b>	Standard charge: 2C Rapid charge: 6000mA
<b>3.9 Max. Discharge Current (Continuous)</b>	20A without 80°C off /30A with 80°C off
<b>3.10 Discharge Cut-Off Voltage</b>	2.50V recommended/ 2.45V lower limited voltage
<b>3.11 Cell Weight</b>	<48 g
<b>3.12 Cell Dimension</b>	Height: 64.95mm ± 0,3 mm Diameter: 18.25mm ± 0,3 mm
<b>3.13 Cell Surface Temperature</b>	Charge: 0 to 60°C (Recommended recharge release < 45°C) Discharge: -20 to 80°C (Recommended recharge release < 60°C)
<b>3.14 Storage Temperature</b>	1 year: -20~25C≤70%RH

# INR 18650 32P

## Cylindrical Lithium Ion Cell


### 4. Outline Dimension with Tube (Unit: mm)

**Attached 1:** Outline Dimensions of INR 18650 32P

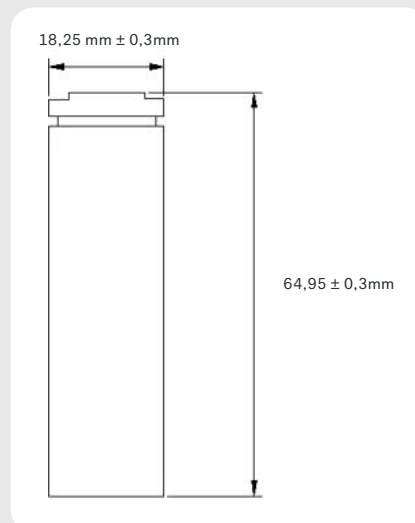

### 5. Cell Marking

**Attached 2:** Standard Marking

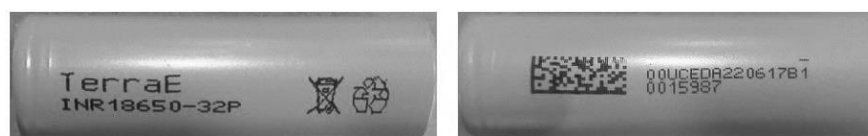

# INR 18650 32P

## Cylindrical Lithium Ion Cell

### 6. Appearance

There shall be no such defect as deep scratch, flaw, crack, rust, leakage, which may adversely affect commercial value of the cell.

### 7. Test Condition and Definitions

#### 7.1 Measuring Equipment

<b>7.1.1 Charge/Discharge Machine</b>	Voltage precision: $\pm 1\text{mV}$ Current precision: $\pm 0.2\%$
<b>7.1.2 Slide Caliper</b>	The slide caliper should have a scale of 0.01mm
<b>7.1.3 Voltage-Impedance Meter</b>	Impedance precision: $\pm 0.5\text{m}\Omega$ Voltage precision: $\pm 1\text{mV}$ The impedance meter should be operated at AC 1kHz

**7.2** Unless otherwise specified, all tests shall be performed at  $25 \pm 2^\circ\text{C}$  and humidity of  $65 \pm 20\%$  RH. The cells used for the test mentioned should be delivered within a week.

**7.3 Definition** **C Rate ("C"):**  
The rate (milliamperes) at which a fully charged cell is discharged to its end voltage in one (1) hour.

### 8. Electrical Characteristics

#### 8.1 Standard Charge

This „Standard charge“ means charging the cell with constant current 0,5C and then with constant voltage 4.2V 0.05C cut-off at  $25 \pm 2^\circ\text{C}$ .

#### 8.2 Standard Discharge Capacity

The standard discharge capacity is the initial discharge capacity of the cell, which is measured with discharge current of 500mA with 2.5V cut-off at  $25 \pm 2^\circ\text{C}$  after the standard charge.  
Standard discharge capacity  $\geq 2450\text{mAh}$

#### 8.3 Standard Rated Discharge Capacity

The standard discharge capacity is the initial discharge capacity of the cell, which is measured with discharge current of 500mA with 2.5V cut-off at  $25 \pm 2^\circ\text{C}$  after the standard charge.  
Standard discharge capacity  $\geq 2325\text{mAh}$

# INR 18650 32P

## Cylindrical Lithium Ion Cell

### 8.4 Temperature Dependence of Discharge Capacity

Capacity comparison at each temperature, measured with discharge constant current 10A and 2.5V cut-off after the standard charge is as follows.

Temperature	Available Capacity
-10°C	≥ 60%
0°C	≥ 80%
25°C	100%
60°C	≥ 90%

Note: If charge temperature and discharge temperature is not the same, the interval for temperature change is 2 hours.

### 8.5 Charge Rate Capabilities

Discharge capacity is measured with constant current 20A and 2.5V cut-off at 25°C after the cell is charged with 4.2V as follows.

Charge Condition		
Current	1500mA	4000mA
Cut-Off	100mA	100mA
Relative Capacity	100%	95%

Note: Percentage as an index of the capacity at 25°C (=3000mAh) is 100%.

### 8.6 Discharge Rate Capabilities

Discharge capacity is measured with the various currents in under table and 2.75V cut-off after the standard charge.

Discharge Condition					
Current	0.44A	1A	5A	10A	15A
Relative Capacity	100%	91%	93%	95%	90%

Note: Percentage as an index of the capacity at 25°C (=3000mAh) is 100%.

# INR 18650 32P

## Cylindrical Lithium Ion Cell

### 8.7 Cycle Life

Each cell is charged in accordance with 7.1, and stored for 5 minutes, then discharged to voltage 2.5V at a constant current of 10A, after that, rest for 30 minutes prior to next charge/discharge cycle. The cell shall be continuously charged and discharged for 800 times at  $25\pm 2^{\circ}\text{C}$ .

After 800 cycles, Capacity Retention =  $\text{Cap}(800\text{th})/\text{Cap}(\text{Av}10) \geq 80\%$

**Note:** The cycle life just can be ensured based on the charge and discharge cycle in the above mode at  $25\pm 2^{\circ}\text{C}$ . For the other operating conditions, cycle life will not be ensured.

### 8.8 Storage Characteristics

The capacity after storage for 28 days at  $25\pm 2^{\circ}\text{C}$  is measured by applying standard charge condition and with discharge current of 10A with 2.5V cut-off at  $25\pm 2^{\circ}\text{C}$ . The capacity retention rate and recovery rate were tested by comparing this capacity with before storage capacity with discharge constant current 10A at  $25\pm 2^{\circ}\text{C}$ .

### 8.9 Status of the Cell as of Ex-Factory

The cell should be shipped in 3.500V ~ 3.650V ( $\leq 30\%$  SOC) Open Circuit Voltage range.

## 9 Mechanical Characteristics

9.1 **Vibration Test** UN38.3 standard

9.2 **Mechanical Shock** UN38.3 standard

## 10. Safety

10.1 **Abnormal Charging Test** UL1642 & IEC62133-2:2017

10.2 **Over-Discharge Test** IEC62133-2:2017

10.3 **Short-Circuit Test** UL1642 & IEC62133-2:2017

10.4 **Crush Test** UL1642 & IEC62133-2:2017

10.5 **Heating Test** UL1642

10.6 **Free Fallin (Drop)** IEC62133-2:20

# INR 18650 32P

## Cylindrical Lithium Ion Cell

### 11. Warranty

- 11.1 The warranty period of a Cell is one (1) year after the delivery to the Customer. However, even though the problem occurs within this period, TerraE won't replace a new cell for free as long as the problem is not due to the failure of TerraE manufacturing process or the problem is due to Customer's abuse or misuse.
- 11.2 TerraE will not be responsible for trouble occurred by handling outside of the precautions in safety instructions.
- 11.3 TerraE will not be responsible for packing, trouble occurred by matching electric circuit, cell pack and charger.
- 11.4 TerraE will be exempt from warrantee any defect cells during assembling after acceptance by the Customer.

### 12. Others

#### 12.1 Storage for a long Time

If the storage time is more than one month, it should be stored in an environment where the temperature is between -20-25°C and the humidity is less than 70% RH and there is no corrosive gas. The batteries should be stored with state of charge 30-50% . We recommend to charge the batteries once per year to prevent overdischarging.

#### 12.2 Others

Any matter not included in that specification should be discussed and confirmed by both parties.

### 13. Packing

Small box 10 X 10 cells. 2 boxes into a case, totally 200 cells.

### 14. Shipping

The capacity of delivery cell is approximately below 30% of charging. It is not specified capacity remain at customer, because of self- discharge. During transportation, keep the cell from acutely vibration, impacting, solarization, drenching.

# INR 18650 32P

## Cylindrical Lithium Ion Cell

The following caution and warning should appear in manuals and/or instructions for users, especially at the point of use.

### Handling Instructions for Lithium Ion Rechargeable Cell

#### 1. Charging Electric Car, Charger and Battery Pack Design Considerations

- 1.1 Charging voltage must be set 4.2V/cell. Concerning charge voltage tolerance of charger, charging voltage must be set below 4.23V/cell. Even if the charge could be out of order, charge voltage of charger should not be above 4.25V/cell to avoid overcharging. Cell life will be shorten by charging voltage above 4.25V, leading to cell failure, serious can appear safety problems.
- 1.2 Cell must be charged with CC (constant current) - CV (constant voltage) method. Do not use the continuous charging method.
- 1.3 In case of cell voltage is below 3.0V, Cell should be charged with pre-charge that current is below 250mA. Then cell voltage reach over 3.0V, standard charge starts. And if cell voltage never reaches to 3.0V in specified period (timer), charger will stop charging.
- 1.4 By timer, current detection and open circuit voltage detection, charger detects full charge. When charger detect cell is full

#### 2. Discharging

- 2.1 The discharge current of a cell must be below specified in the product specification.
- 2.2 The discharge end voltage of a cell must be over specified in the product specification.
- 2.3 The cell should not be over-discharged below 2.5V.
- 2.4 The cell should be discharged within a range of temperatures specified in the product specification.



# INR 18650 32P

## Cylindrical Lithium Ion Cell

### 3. Storage

- 3.1 The cell should be stored in a dry area and no corrosive gas.
- 3.2 No press on the cell.
- 3.3 When stored within 1 month : -20°C ~ +60°C  
When stored within 3 months: -20°C ~ +45°C  
When stored within 12 months : -20°C ~ +25°C
- 3.4 After the cell assembled in pack, the pack should be recharged to 40% SOC if the pack has never been used for one (1) year, this will avoid the cell voltage drop too low.

### 4. Cycle Life

- 4.1 Charge or discharge out of recommended range might cause the generating heat or serious damage of cell. And also, it might cause the deterioration of cell's characteristics and cycle life.
- 4.2 **Cycle Life Performance**  
The cell can be charged/ discharged repeatedly up to times with a certain level of capacity specified in the production specification.
- 4.3 Cycle life may be determined by conditions of charging, discharging, operating temperature and storage.

### 5. Precautions on Battery Pack Design

- 5.1 Do not make the shape and mechanism which static electricity and water easy go through the battery pack inside.
- 5.2 Overcharge protection should work below 4.2V/cell by charge. Then charge current shall be shut down.
- 5.3 Within a voltage range of 2.5V/cell, over-discharge protection should work. Then discharge current shall be shut down and consumption current is below 1 $\mu$ A.
- 5.4 When discharge current exceeds 60A, over-discharge current protection should work. Then over discharge current shall be shut down.
- 5.5 To avoid discharging during storage, design the low consumption current electronic circuit (e.g. Protection circuit, fuel gauge, etc) inside battery pack.

# INR 18650 32P

## Cylindrical Lithium Ion Cell

### 6. Battery Pack Assembly

- 6.1 Prohibition of usage of damaged cell. Do not use abnormal cell which has been damaged by shipping stress, drop, short, twice spot or something else, and which gives off electrolyte odor.
- 6.2 The cell should be inspected visually before battery assembly.
- 6.3 Inspect voltage and internal impedance before using.
- 6.4 Do not solder onto a cell in order to avoid damage on the cell. Weld spot welding lead plate onto cell, and solder lead wire or lead plate.
- 6.5 The battery assembly must pay attention to anti-static, Avoid electronic components damaged by electrostatic.
- 6.6 Battery assembly should pay attention to prevent the short circuit.

### Safety Instruction

Lithium-ion battery if use undeserved can cause cell damage and even harm the personal safety, read it carefully before using and pay attention to the prevention measures. Should there be any additional information required by the Customer, please contact BMZ Germany GmbH, Zeche Gustav 1, 63791 Karlstein

### Danger

#### 1. Electrical Misusage

- 1.1 Use or charge the battery only in the stipulated application.
- 1.2 Use the correct charger for Lithium-ion batteries.
- 1.3 When connecting a battery pack to a charger, ensure correct polarity.
- 1.4 Do not reverse charge batteries.
- 1.5 Do not maintain secondary batteries on charge when not in use.

# INR 18650 32P

## Cylindrical Lithium Ion Cell

### 2. Environmental Misusage

- 2.1 Never put a battery into water or seawater.
- 2.2 Don't throw the battery into the fire.
- 2.3 Do not use or leave the cell under the blazing sun (or in heated car by sunshine). The cell may generate heat, smoke or flame. And also, it might cause the deterioration of cell's characteristics or cycle life.
- 2.4 Do not dismantle, open or shred cells. Batteries should be dismantled only by trained personnel. Multicell battery cases should be designed so that they can be opened only with the aid of a tool.
- 2.5 Do not solder directly to batteries.
- 2.6 Do not subject batteries to adverse condition such as extreme temperature, deep cycling and excessive overcharge/ over discharge.
- 2.7 Do not short-circuit batteries. Do not store batteries haphazardly in a box or drawer where they may short-circuit each other or be short-circuited by conductive materials, permanent damage to batteries may result.
- 2.8 Do not incinerate or mutilate batteries, may burst or release toxic material.
- 2.9 Do not subject batteries to mechanical shock.

### WARNING

- 1.1 When using a new battery or a battery to be used for the first time after long term storage, please fully charge the battery before using.
- 1.2 Reverse charge is prohibited. Cells shall be connected correctly. The polarity has to be confirmed before wiring. If a cell is connected improperly, the cell cannot be charged. Simultaneously, the reverse charging may cause damage to the cell which may lead to degradation of cell performance and damage the cell safety, and could cause heat generation or leakage.
- 1.3 Do not mix our batteries with other battery brands or batteries of a different chemistry such as alkaline and zinc carbon.
- 1.4 Do not mix new batteries in use with semi-used batteries, over-discharge may occur.
- 1.5 If find any noise, excessive temperature or leakage from a battery, please stop its use.

# INR 18650 32P

## Cylindrical Lithium Ion Cell

- 1.6 When the battery is hot, please do not touch it and handle it, until it has cooled down.
- 1.7 Do not remove the outer sleeve from a battery pack nor cut into its housing.
- 1.8 When find battery power down during use, please switch off the device to avoid over discharge.
- 1.9 After using, if the battery is hot, before recharging it, allow it to cool in a well-ventilated place out of direct sunlight.
- 1.10 Do not attempt to take batteries apart or subject them to pressure or impact. Heat may be generated or fire may result. The alkaline electrolyte is harmful to eyes and skin, and it may damage clothing upon contact.
- 1.11 Never put a battery into water or seawater.
- 1.12 Keep the battery away from babies and children. If swallowed, see a doctor immediately.
- 1.13 In the event of a cell leaking, do not allow the liquid to come into contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.

### CAUTION

- 1.1 When not using a battery, disconnect it from the device.
- 1.2 Unplug a battery by holding the connector itself and not by pulling at its cord.
- 1.3 Used batters should be treated by authorized units.
- 1.4 After extended periods of storage, it may be necessary to charge and discharge the batteries several times to obtain maximum performance.
- 1.5 Secondary batteries give their best performance when they are operated at normal room temperature.
- 1.6 Keep batteries clean and dry.
- 1.7 Wipe the battery terminals with a clean dry cloth if they become dirty.
- 1.8 When disposing of secondary batteries, keep batteries of different electrochemical systems separate from each other.

## Any questions?

Contact us, we will be pleased to advise you.

### A full load of advantages

Customized cells tailored to your individual requirements with the best choice in Li-Ion technology for the coming development.



One-Stop Shop



Customized



High Quality






More Power



High Energy

#### Headquarter Germany

TerraE GmbH  
Zeche Gustav 1  
63791 Karlstein am Main

 +49(0) 6188-9956-0  
 [info@terrae.com](mailto:info@terrae.com)  
 [www.terrae.com](http://www.terrae.com)

**Power** – the result of a better battery